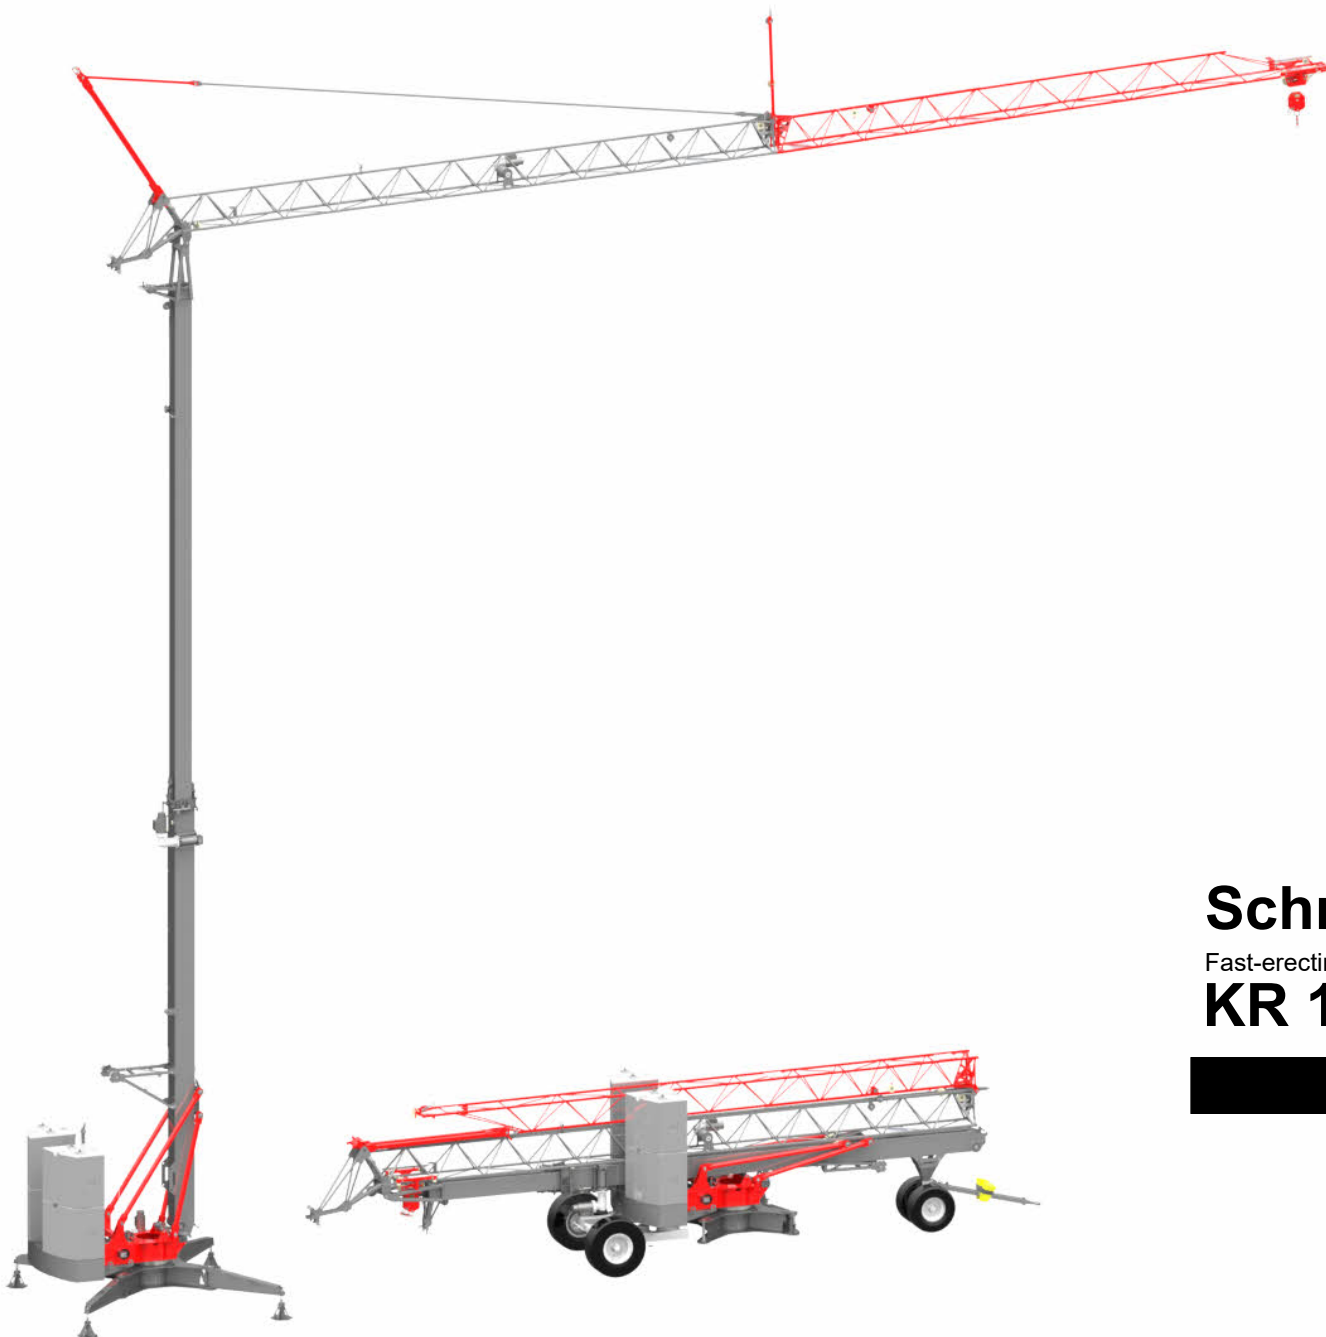





KR Drives[®]



D

37 kWh / 100

91 dB
A_BCD

+25

Schnelleinsatzkrane

Fast-erecting crane/Żuraw szybkomontujący

KR 15 RAPID

CE

Technische daten:

Technical data:

Dane techniczne:

Max. Traglast 1.5 t

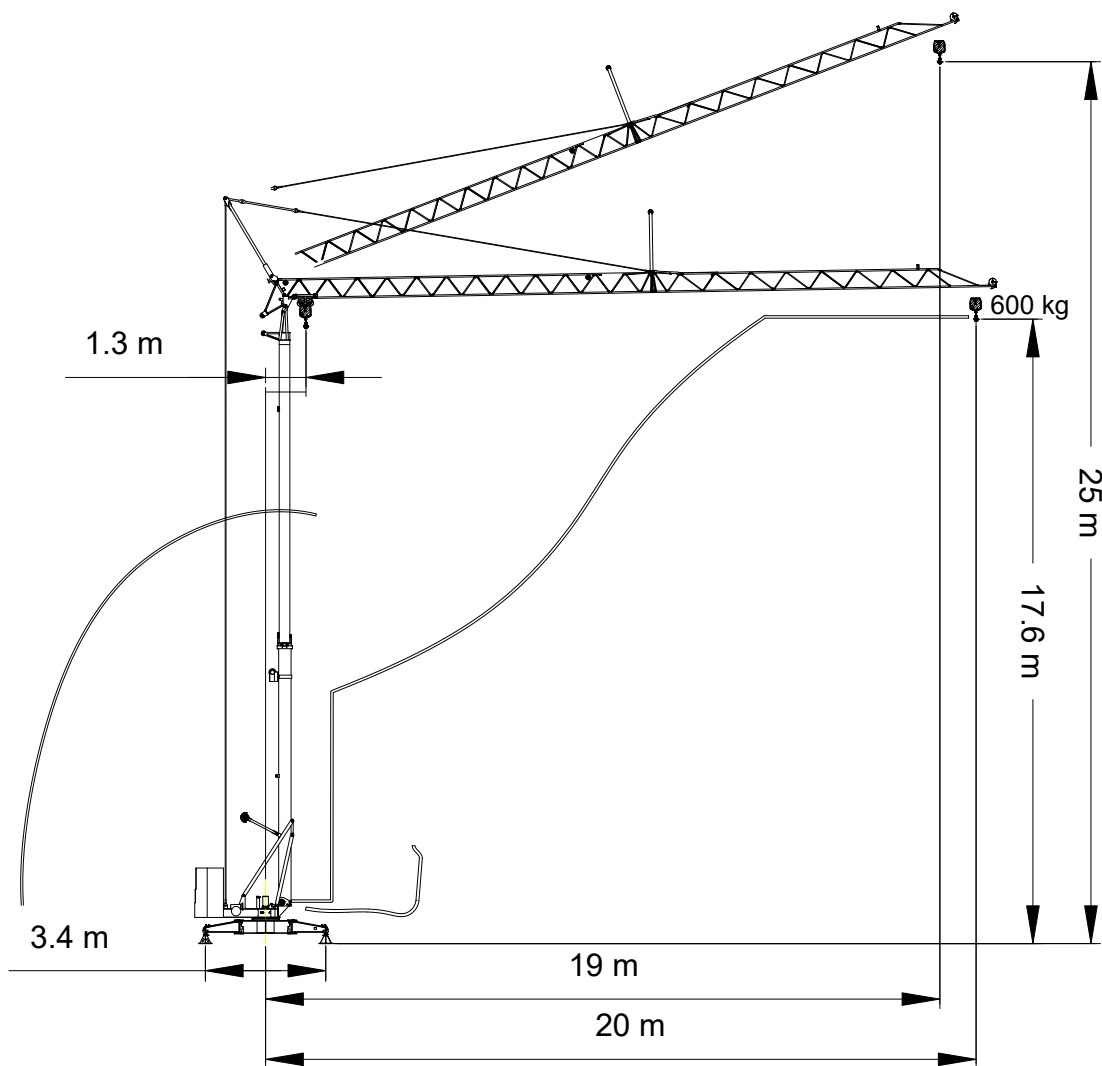
Max. capacity
Maks. udźwig

Max. Ausladung 20 m

Max. jib-length
Maks. wysięg


Aufstellvorgang und Transport

Erection and transport/Montaż i transport

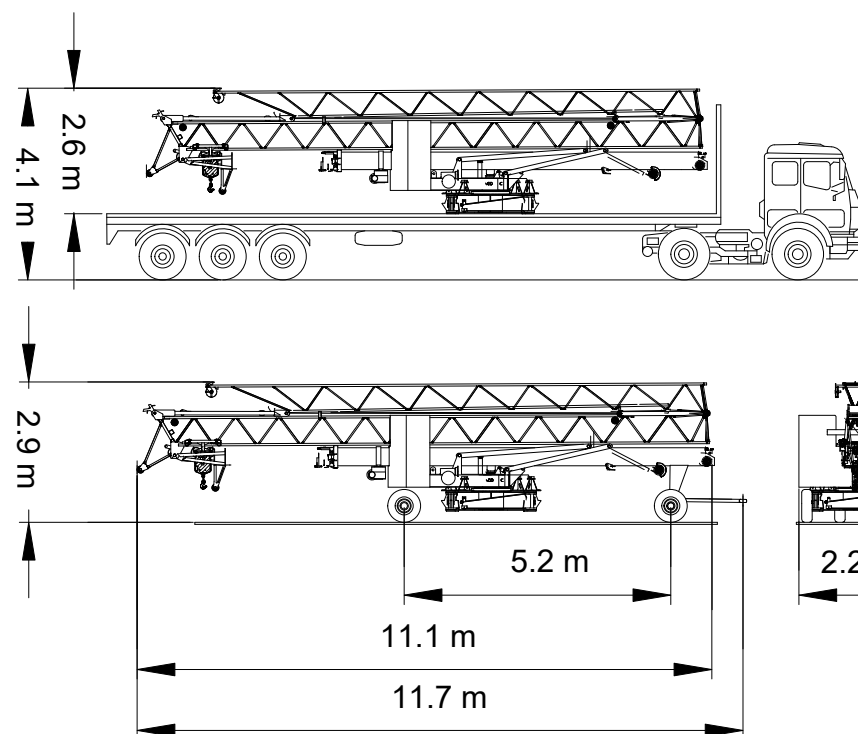


Traglastabelle

Table of capacity/Tabela udźwignów

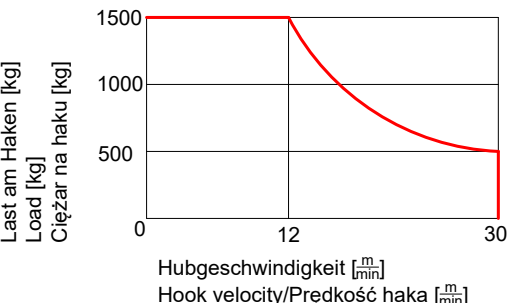
						
[m]	1500 [kg]	9	12.5	16	17	20
20.0	1.3 - 9.0	1500	1020	756	702	600

						
[m]	600 [kg]	9	12.5	16	17	19
19.0	1.3 - 19.0	600	600	600	600	600



Antriebe








Data of drives/Dane napędów

	$V \rightarrow 0 - 30 \frac{m}{min}$	1.5 kW	400 V 50 Hz
	$V \rightarrow 0 - 1.0 \frac{1}{min}$	1.5 kW	3 Ph
 Max. HH für: HH max. for winch type: HH maks. dla wciągarki typu: Standard = 25 m			
Art Type/Typ FU/H 4.4 4.4 kW	 Last am Haken [kg] Load [kg] Ciężar na haku [kg] Hubgeschwindigkeit $\frac{m}{min}$ Hook velocity/Prędkość haka $\frac{m}{min}$ 1.5 t		Versorgungsspannung AC Supply voltage Napięcie zasilania 400 V / 230 V
			Antriebsleistung gesamt Max motor output Suma mocy silników ~7.4 kW
			Anschlussleistung Connected power Moc przyłączeniowa 8.9 kVA

Nach Norm EN 14439
All data refer to standard EN 14439
Zgodnie z normą PN-EN 14439

Kolli-Liste

Packing list/Listy elementów

Pos. Item Lp.	Anz. Qty. Ilość	Teil Element Element				L [m]	B [m]	H [m]	Gewicht* Weight* Waga* [kg]
1	4	Ballast Ballast Balast			links / left / lewy rechts / right / prawy	0.78	0.87	0.90	4x1100
2	1	Ballastbasis Ballast base Podstawa balastu				2.20	1.40	0.47	1807
3	1	Transportachse vorne Road transport axle front Oś przednia				7.88	2.58	3.87	216
4	1	Transportachse hinten Road transport axle behind Oś tylna				6.66	6.71	3.15	485
5	4	Stützpyramide Pyramidal support Podpora				0.38	0.33	0.27	4x15
6	1	KR 15 RAPID gefalteter KR 15 RAPID folded KR 15 RAPID złożony				11.44	1.83	2.57	4300

*Montagegewichte siehe Betriebsanleitung
*Mounting weights see: Manual instruction
*Ciężary montażowe patrz: Instrukcja Obsługi

www.krupinskicranes.com



Änderungen vorbehalten! Sämtliche Angaben erfolgen ohne Gewähr
Subject to alterations! This information is supplied without liability.
Producent zastrzega sobie prawo do wprowadzania zmian.

PN-EN 14439 | C.0.10.0012 (BGL) | A3 (FEM 1.001) | HD4 HC1 (PN-EN 13001-2)